EN

2020

PROTEC

System Novatek strong

The NOVATEK STRONG security system is implemented with frame panels and posts section of 50x50 mm.; the coupling is done by "passing through" screws. The system is mainly used by those who have to delimit hazardous areas and must ensure a high level of impact resistance. Also the section of the upright 50x50 gives a greater guarantee of strength from the visual point of view.



Modular

Each component has been studied to be able to be modular, in fact the same panels act both as fixed elements and by using our kits, they transform into hinged or sliding doors.



Visibility


The innovative system of the 32x67 mm. and Ø3 mm. wire combined with the black color of the panel improves the visibility of the machinery inside the protected area.



Solid

The Novatek panel has a welded mesh inside the profile that gives it a greater elegance and rigidity.

System Novatek strong

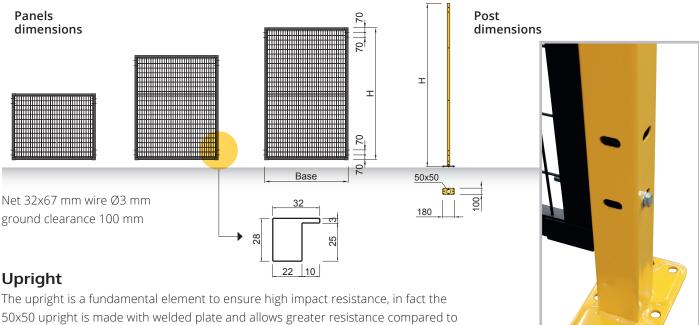

traditional upright with section 40x40.

Installation is much faster than traditional systems with feet, the position of the holes, allows fixing the upright to the floor without moving it from the desired position.

Panels dimensions

PROTEC

Item N°	Base	Height	Color
PNNA001	250	950	RAL 9005 antiscratch
PNNA002	400		
PNNA003	700		
PNNA004	1000		
PNNA005	1200		
PNNA006	1500		
PNNA007	250	1500	
PNNA008	400		
PNNA009	700		
PNNA010	1000		
PNNA011	1200		
PNNA012	1500		
PNNA013	250	1900	
PNNA014	400		
PNNA015	700		
PNNA016	1000		
PNNA017	1200		
PNNA018	1500		

Colors on request for panels and posts



Uprights dimensions

Item N°	Height	Section	Plate	Color
MT300	2000	50x50	100x180	
MT604	2560	50x50	100x180	
MT605	2960	50x50	100x180	
MT606	3110	50x50	100x180	
MT607	3500	50x50	100x180	RAL 1003
KRMT001 KA102ZN	Leveling kit for 50x50 uprights Level plate dim.100x180 sp. 25/10			



www.protec-italy.net



PROTEC Srl Via Zamenhof, 363 36100 VICENZA - ITALY Tel. +39 0444 246080 Fax +39 0444 240251 info.protec@grupposicura.it